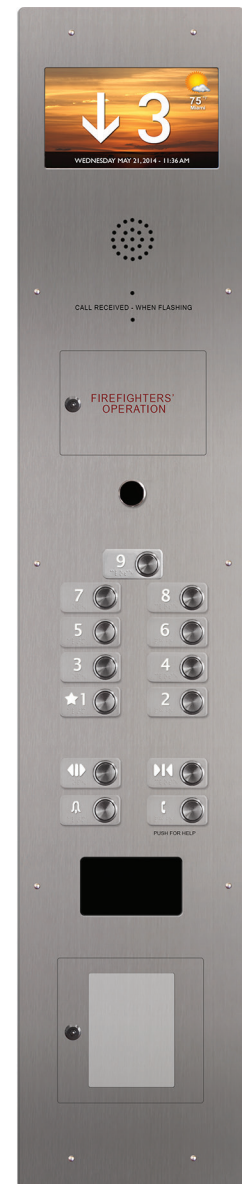# BS SERIES

The BS Series pushbuttons is vandal-proof, machine-turned stainless steel with an illuminated ring. Buttons may be paired with a large selection of braille tags to combine aesthetics and accessibility.

- ✔ Studless Mounting
- ✔ Vandal-proof
- ✔ Stainless Steel or PVD Brass, non-tarnishing finish
- ✔ LED Illumination available in Red, Green, Blue, White & Amber

SS#4 COP shown with 10" Mosaic TFT PI, BS Moon pushbutton, Caesar white illuminated tactile, 2010 code with service cabinet

Available Options

California

Moon

Classic

General Details

General: Vandal-proof Studless Frontal Mounting Stainless Steel Pushbutton. Fastened by jam-nut on plates from 11 to 22 Gauge thick.

Pressel: AISI 303 turned Stainless Steel (standard or PVD-coated finishes) Pressel activation is limited by Stainless Steel base in Pressel. This prevents any stress on contact block resulting in an extremely robust vandal-proof pushbutton.

Contacts: Available with one or two microswitch(es)

Wiring: Screw terminals or JST Pin Connector
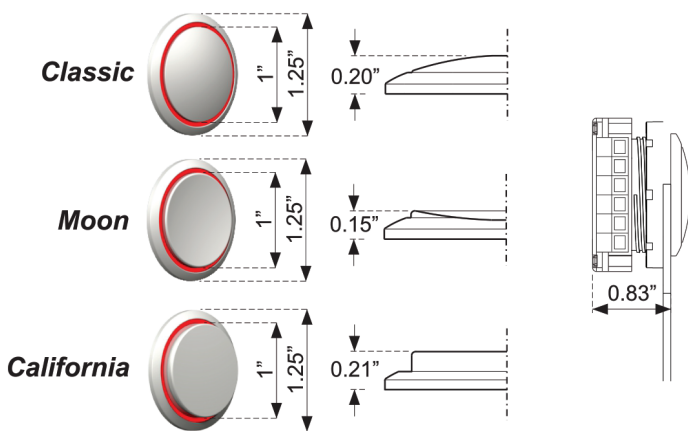
Voltage: Multivolt: 6V to 120V AC/DC, 24V AC/DC

Illumination: LED-illumination of target in Red, Green, Blue, White and Amber
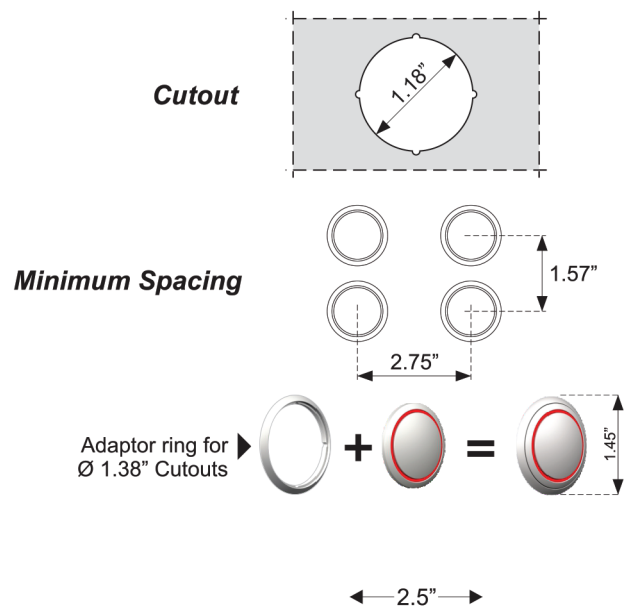
Stroke: 0.040"

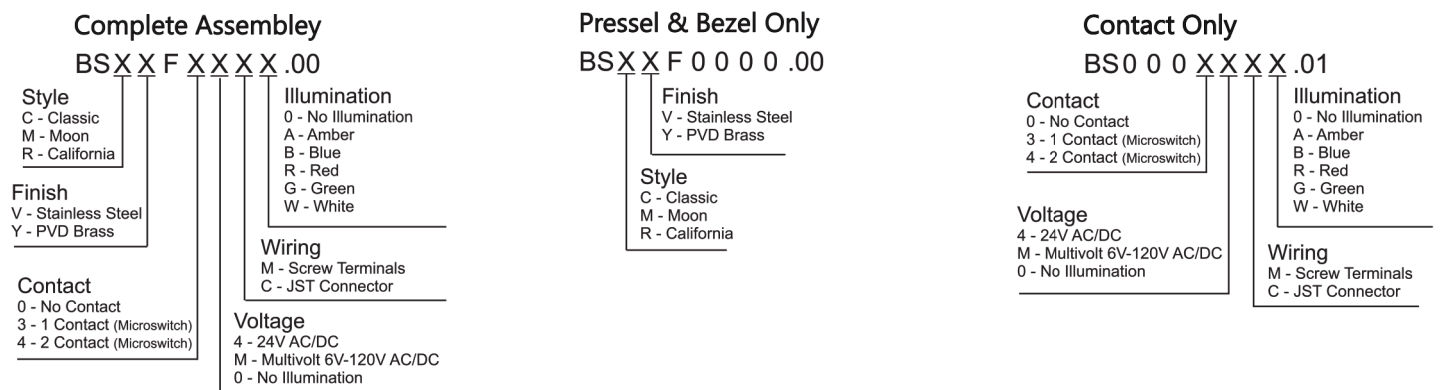**Avg. Life:** 1,500,000 activations

Degree of protection: IP54

Physical Characteristics

Classic 1" 1.25" 0.20"

Moon 1" 1.25" 0.15"

California 1" 1.25" 0.21"

0.83"

Mounting Requirements

Cutout 1.18"

Minimum Spacing 1.57" 2.75"

Adaptor ring for Ø 1.38" Cutouts + = 1.45"

2.5"

Component Ordering Information

Complete Assembley
BS X X F X X X X .00

Style
C - Classic
M - Moon
R - California

Finish
V - Stainless Steel
Y - PVD Brass

Contact
0 - No Contact
3 - 1 Contact (Microswitch)
4 - 2 Contact (Microswitch)

Voltage
4 - 24V AC/DC
M - Multivolt 6V-120V AC/DC
0 - No Illumination

Wiring
M - Screw Terminals
C - JST Connector

Illumination
0 - No Illumination
A - Amber
B - Blue
R - Red
G - Green
W - White

Pressel & Bezel Only
BS X X F 0 0 0 0 .00

Finish
V - Stainless Steel
Y - PVD Brass

Style
C - Classic
M - Moon
R - California

Contact Only
BS 0 0 0 X X X X .01

Contact
0 - No Contact
3 - 1 Contact (Microswitch)
4 - 2 Contact (Microswitch)

Voltage
4 - 24V AC/DC
M - Multivolt 6V-120V AC/DC
0 - No Illumination

Illumination
0 - No Illumination
A - Amber
B - Blue
R - Red
G - Green
W - White

Wiring
M - Screw Terminals
C - JST Connector

www.madelevator.com   customerservice@madelevator.com