



BP SERIES

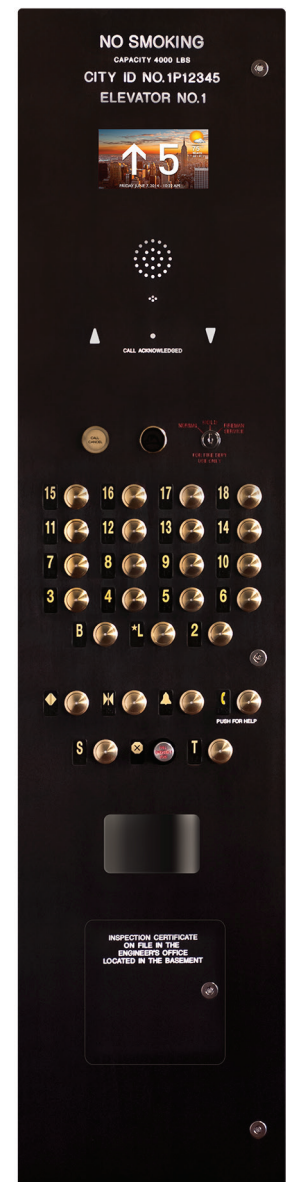

The **BP Series** pushbuttons is vandal-proof, machine-turned stainless steel with an illuminated central target. Buttons may be paired with a large selection of Braille tags combine aesthetics and accessibility.

- ✓ Studless Mounting
- ✓ Vandal-proof
- ✓ Stainless Steel or PVD Brass, non-tarnishing finish
- ✓ LED Illumination available in Red, Green, Blue, White & Amber



Oil Rubbed Finish COP shown with 7" Mosaic TFT PI, BP Classic Pushbutton, Plaza Slimline flush mount tactile, 2000 code with service cabinet

Available Options



Classic

General Details

General: Vandal Proof Studless Frontal Mounting Stainless Steel Pushbutton. Fastened by jam-nut on plates from 11 to 22 Gauge thick.

Pressel: AISI 303 turned Stainless Steel (standard or PVD-coated finishes) Pressel activation is limited by Stainless Steel base in Pressel. This prevents any stress on contact block resulting in an extremely robust vandal-proof pushbutton.

Contacts: Available with one or two microswitch(es)

Wiring: Screw terminals or JST Pin Connector

Voltage: Multivolt: 6V to 120V AC/DC, 24V AC/DC

Illumination: LED-illumination of target in Red, Green, Blue, White and Amber


Stroke: 0.040"

Avg. Life: 1,500,000 activations


Degree of protection: IP54



Physical Characteristics

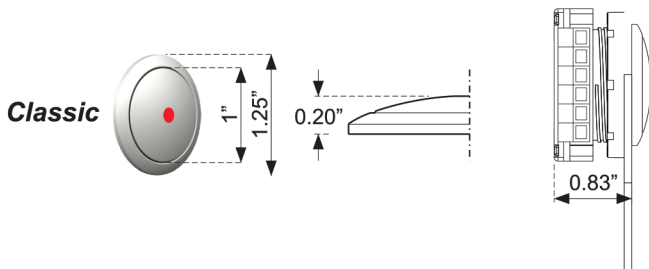

Mounting Requirements

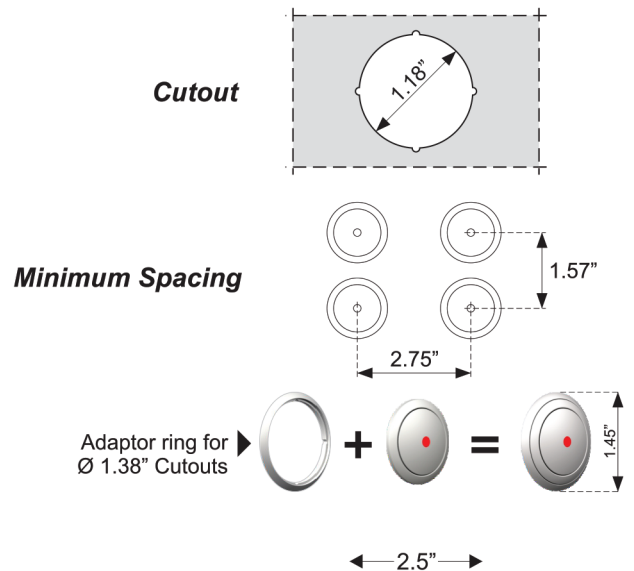

Component Ordering Information

