


BL SERIES



The **BL Light** pushbutton is a stamped shot-peen stainless finish with LED illumination. The tactile symbol and perimeter illuminate on activation.

- ✓ Studless Mounting
- ✓ Round or Square, with or without tactile
- ✓ Shot-peen anti-fingerprint stainless steel
- ✓ LED Illumination available in Red, Green, Blue, White & Amber

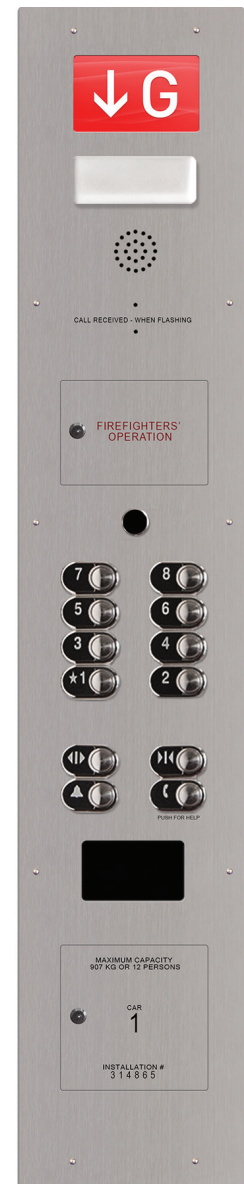

SS#4 COP shown with 7" Mosaic TFT PI, BS classic pushbutton, Julius surface mount and surround, 2010 code with service cabinet

Available Options



California



Single Illumination



Double Illumination

General Details

General: Vandal Proof Studless Frontal Mounting Stainless Steel Pushbutton. Fastened by jam-nut on plates from 11 to 22 Gauge thick.

Pressel: AISI 303 turned Stainless Steel (standard or PVD-coated finishes) Pressel activation is limited by by Stainless Steel base in Pressel. This prevents any stress on contact block resulting in an extremely robust vandal-proof pushbutton.

Contacts: Available with one or two microswitch(es)

Wiring: Screw terminals or JST Pin Connector

Illumination: LED-illumination of target in Red, Green, Blue, White and Amber


Stroke: 0.040"

Avg. Life: 1,500,000 activations

Degree of protection: IP54




Physical Characteristics

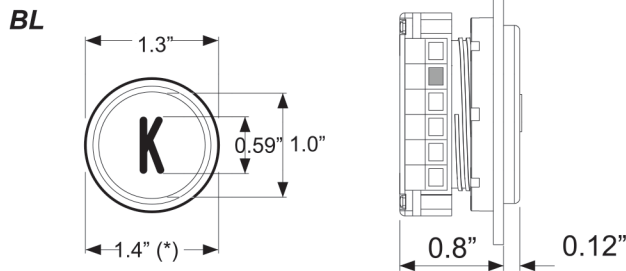


Mounting Requirements

Cutout



Minimum Spacing



Component Ordering Information

